


HALIGHT Downlight

RoHS CE



Features

- Special HALELED design with Anti-Glare Lens and Reflector
- Integrated design, driver inside, easy to install
- super slim and elegant
- CE and RoHS compliant
- Smooth dim to warm function
- 85% energy saving
- Brushed Alu and white also available

Applications

- Home, villa and other residential buildings
- Shopping mall, Hotels, restaurants, bars, cafes
- Office and government buildings

Product Overview

Wattage (W)	6
Incandescent Equivalent (W)	40
Dimmable	Yes
Socket	-
Lumens (lm) by 90°	400
Luminous intensity(cd)	900
Energy efficiency class	A+
PF	>0.8
CCT (K)	2700-2300
CRI (Ra)	90
Voltage (V)	AC176-264
Current (mA)	34
Frequency(Hz)	50/60
Beam Angle (deg)	36
Lifespan(hrs)	25000 / 100000 Switching Cycles
Working Temperature (°C)	-20 ~ 40
Storage Temperature (°C)	-20 ~ 60

6W Super-slim HALED Downlight


Nickel

Physical data

Weight (g)	104
Lamp Length (mm) - C/L	31.4
Max. Lamp Diameter (mm) - D	85
Lamp dimension equal to filament lamp equivalent	Yes
Designed for optimum use in non standard conditions	No
Fluorescent lamp replacement	No
Single packaging type	Box
Single package dimensions (L x W x H) (cm)	100 x 90 x 45 / 1PCS
Inner package dimensions (L x W x H) (cm)	465 x 110 x 110 / 10PCS
Outer package dimensions (L x W x H) (cm)	575 x 480 x 245 / 100PCS

* Do not use in close luminaire.

Technical Drawings

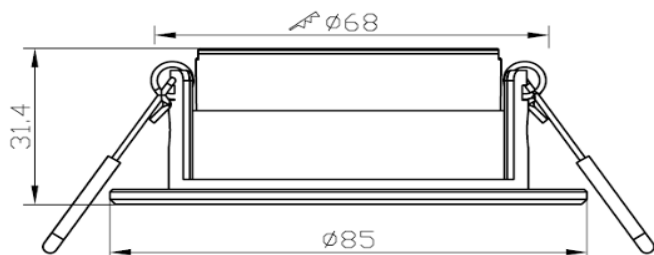

Energy Label

