

*Features:

- HALED patent optics design, similar to halogen light effect
- Easy and quick installation
- $PF > 0.85$, flicker free, follows new ErP
- Dimmable or Dim to warm halogen function by triac dimmer
6W HALED lamp replace 50W halogen lamp
8W HALED lamp replace 75W halogen lamp
- CRI 95, $R9 > 70$
- Low UGR
- Peak luminous intensity is 1.25 times of parallel products
- Suitable for all kinds of unenclosed luminaire
- Metal structure, excellent heat dissipation
- Lifespan 40,000 hrs, 5 years warranty
- High energy efficiency



Applications


- Residential application and hotel lighting.
- Commercial lighting like restaurants, bars, cafes, etc.

Technical data

Part No.	Type of installation
WMW002W09	Double wiring
Electrical specifications	
Wattage (W)	9W
AC input voltage (V)	AC200V-240V
Frequency (Hz)	50/60Hz
Flicker metric PST	0.023
Total harmonic distortion (THD)	24%
Max. no. of lamps on B16A circuit breaker	250
Max. no. of lamps on C16A circuit breaker	250
Photometric specifications	
Color temperature (CCT)	3000K
Chromaticity coordinate (x/ y)	3000K: 0.440/ 0.403
Useful luminous flux (lm)	550lm $\pm$ 5%
UGR	≤ 19

Power factor	> 0.9
Current	43mA
DC output voltage (V)	-
Stroboscopic effect metric SVN	0.25
Dimmable	Yes
Max. no. of lamps on C10A circuit breaker	160
CRI/ R9	95/ > 70 (Min.)
Standard deviation of colour	≤ 3 SDCM
Luminous efficiency (lm/W)	60lm/ W

Photometric Information

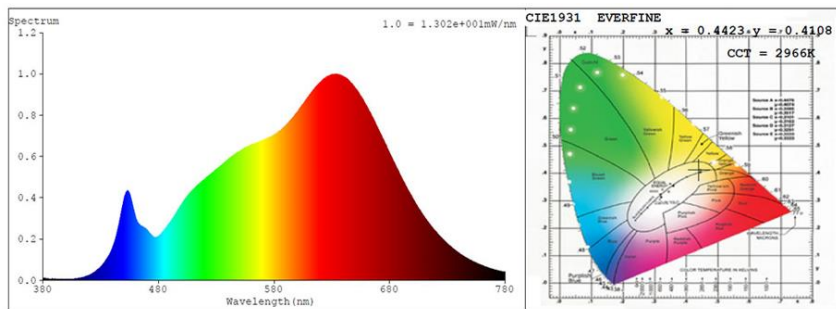

EAN	Colour	Beam angle	Peak Luminous intensity		
4060574475983	Titanium	24°	1750cd		
4060574475938	Titanium	36°	1350cd		

Mechanical specifications

Housing material	Aluminium
Optical cover/ lens material	Al Reflector+PC+Glass
Width/ diameter	50mm
Product weight	100g

Lifespan

Number of switching cycles	100,000-
L80/B10 service life at 25°C	40,000 hrs
Warranty	5 Years

Application parameters

Working temperature range	-20~+50°C
---------------------------	-----------

Package

Individual package length	50mm
Individual package height	60mm
Driver	Internal
Shipping box length	580mm
Shipping box height	185mm


Housing Colour	Titanium
Length/ diameter	50mm
Height	50mm

L70/B50 service life at 25°C	50,000 hrs
L90/B10 service life at 25°C	20,000 hrs

Storage temperature range	-20~+70°C
---------------------------	-----------

Individual package width	50mm
Gross weight (single item)	115g
Packaging unit	100pcs
Shipping box width	285mm
Gross weight (Shipping box)	12kgs


Technical Drawings (mm)



Package



Inner Box 50*50*60mm

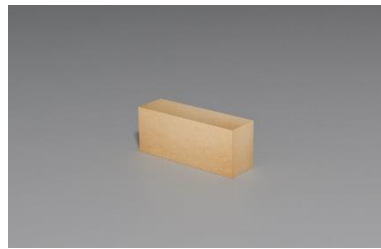


Inner Carton 270*110*80mm(10PCS)



Shipping Carton 580*285*185mm(100PCS)

Installation /Mounting:

Please read the entire instruction manual before using the product and reserve it for future reference. We reserve the right for any error in text or image and any necessary change made to technical data. If you have any question regarding technical problems, please contact our Customer Services.

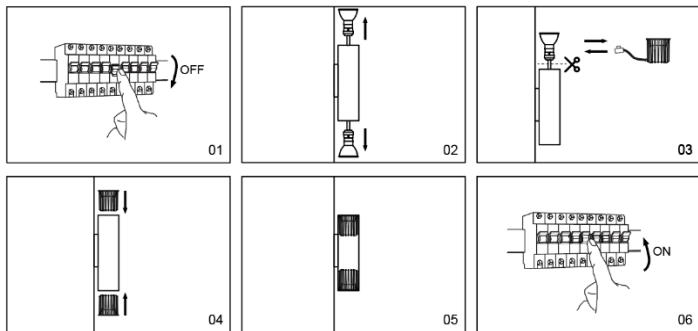

Cautions:

- Don't touch the lamp when it is lighted
- Don't use it in enclosed luminaire
- Power off before replacement
- Do not in violation of any fire regulations when using
- Consult professional electricians for technical support
- If the cable is damaged, it must be replaced by the manufacturer and its service agent, or qualified person in order to avoid hazards.