




DRIFT LED 0-6W




DRIFT LED 3-18W




DRIFT LED 0-30W




DRIFT LED 0-6W



DRIFT LED 3-18W



DRIFT LED 0-30W

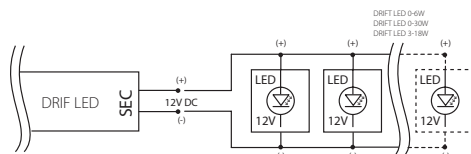

DRIFT LED 0-6W
DRIFT LED 0-30W
DRIFT LED 3-18W

► casing: plastic

► Gehäuse: Kunststoff

Kanlux	Kanlux		PRI	SEC		Tc max [°C]		
DRIFT LED 0-6W	18040	white / weiß	220-240V~ 50/60Hz	DC 0,5A (12V); 0...6W	45	80	1/-/180	32
DRIFT LED 3-18W	08550	white / weiß	220-240V~ 50/60Hz	DC 1,5A (12V); 3...18W	50	85	1/-/100	100
DRIFT LED 0-30W	18041	white / weiß	220-240V~ 50/60Hz	DC 2,5A (12V); 0...30W	45	75	1/-/84	156



voltage stabilisation 12V DC / built-in short circuit protection and overload protection / DRIFT LED 0-6W and 0-30W models equipped with 15cm long 0,75mm² cables / DRIFT LED 3-18W model connection through 0,5-1,5mm² clips
Spannungstabilisierung 12V Gleichstrom / eingebaute Durchbrenn- und Überspannungssicherung / die Modell DRIFT LED 0-6W und 0-30W sind mit einer 0,75mm²-Leitung mit einer Länge von 15 cm ausgestattet / das Modell DRIFT LED 3-18W werden mit 0,5-1,5mm²-Klemmen angeschlossen